


EPAFIL MPK10 - MPK10M

FILTRI ASSOLUTI MINI PLEAT E10
Mini pleat absolute filters E10

composizione media filtrante: <i>filter medium composition:</i>	microfibra di vetro <i>glass micro fiber</i>
materiale telaio: <i>frame material:</i>	MPK=MDF MPK10M=lamiere zincata <i>MPK=MDF MPK10M=galvanized sheet</i>
temperatura max di esercizio: <i>max. working temperature:</i>	70° C
U.R. max di esercizio: <i>max. working R.H.:</i>	90%
efficienza M.P.P.S.: <i>efficiency M.S.S.S.:</i>	≥85%
perdita di carico iniziale: <i>initial pressure drop:</i>	125 Pa
perdita di carico finale: <i>final pressure drop:</i>	600 Pa
classificazione [EN 1822-1:2019]: <i>classification [EN 1822-1:2019]:</i>	E10

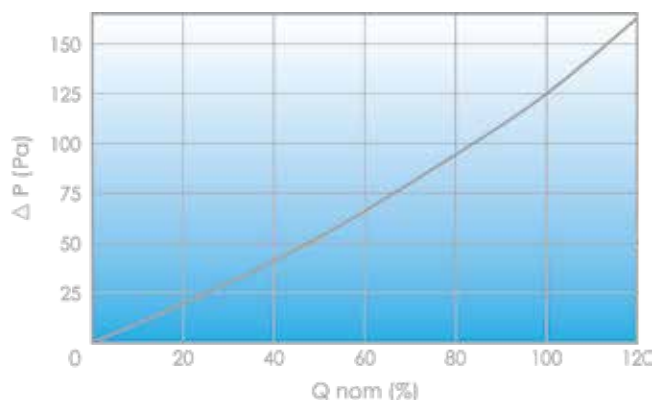

APPLICAZIONI:

- Ventilazione e condizionamento nell'industria elettronica, farmaceutica, fotografica.
- Controllo di atmosfere in ospedali, laboratori, camere bianche, centro elaborazione dati.

APPLICATIONS:

- Ventilation and conditioning in the electronics, pharmaceutical and photographic industry.
- Atmosphere control in hospitals, laboratories, clean rooms, processing data centres.

codice code	dimensioni dimensions (mm)	portata d'aria air flow (m³/h)
MK10121206	305 x 305 x 150	500
MK10122406	305 x 610 x 150	1.000
MK10181806	457 x 457 x 150	1.150
MK10182406	457 x 610 x 150	1.500
MK10242406	610 x 610 x 150	2.000
MK10243006	610 x 762 x 150	2.500
MK10243606	610 x 915 x 150	3.000
MK10244806	610 x 1.220 x 150	4.000

codice code	dimensioni dimensions (mm)	portata d'aria air flow (m³/h)
MK101212M6	305 x 305 x 150	550
MK101224M6	305 x 610 x 150	1.050
MK101818M6	457 x 457 x 150	1.200
MK101824M6	457 x 610 x 150	1.600
MK102424M6	610 x 610 x 150	2.100
MK102430M6	610 x 762 x 150	2.650
MK102436M6	610 x 915 x 150	3.150
MK102448M6	610 x 1.220 x 150	4.200

NB. Versione flangiata: contattare ns. divisione commerciale. Tutti i filtri sono corredati di certificato di collaudo individuale.

NB. In order to receive the flange version, please contact our trade department. All filters are accompanied by their individual testing certificate.

